



motorola drive


WIRELESS CAR ADAPTER
For Android Auto™

Model: MA2



Quick Start Guide

1. Getting to know your adapter

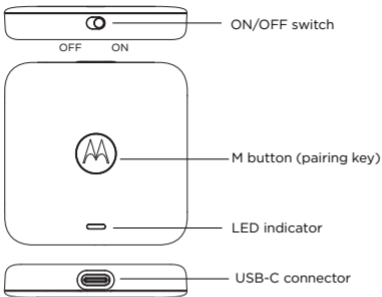

2. Setting up your adapter

Android operating system of Mobile phone Requirement

- To use Android Auto wirelessly, your phone should be running version 11 or higher of Android operating system.
- Before setting up MA2 adapter, connect your mobile phone to your car with a wired USB cable and Android Auto screen shall be popped up on your car screen. Then, following on vehicle manufacturer's instruction and mobile phone instruction to complete setup such as:
 - USB Preference page, click "File transfer /Android Auto".
 - Share your maps location of your mobile phone.

- While the Android Auto connection is active on your car screen, unplug your phone from the car and immediately plug your MA2 adapter into same USB port.
- Make sure the slide switch is at the ON position.

Pair with MA2 wireless car adapter

- When MA2 adapter flashes blue, pair your phone with it (look for 'AndroidAuto-XXXX' under Settings > Bluetooth on your phone).

Now, wait for your phone to automatically re-establish its Android Auto connection wirelessly through this MA2 adapter; this may take a while.

3. LED definitions

Slide the switch to the ON position to power on the MA2.

Event status	M button	LED colour
Power on state	-	Solid white
Pairing mode	During power on, press and hold the button for more than 2s and release the button or auto enter into pairing mode when there is no phone paired	Blinks blue
Bluetooth connecting	-	Blinks green (1s on, 1s off)
Bluetooth connected	-	Solid green
Sleep mode	-	Off

4. Dual Phone Pairing & Switching

The MA2 supports up to two phones. Use the M button to toggle pairing or switch connections.

Case 1 - Pairing a Second Phone

- Ensure Phone A is connected to your car via MA2.
- Turn off Wi-Fi and Bluetooth on Phone A.
- Short press the M button → MA2 enters pairing mode.
- On Phone B, open Bluetooth settings and pair with MA2.
- MA2 will now switch to Phone B.

Case 2 - Switching Between Two Paired Phones

- Confirm both Phone A and Phone B are already paired with MA2.
- Short press the M button.
- On the phone you want to use, go to Bluetooth list and manually reconnect.

5. Factory reset

With some unexpected cases happened, you would need to erase MA2 memory to retrieve to factory settings:

- During power on, press and hold the M button for more than 60s, release the button when the LED blinks green quickly.

After factory reset, you need to do the pairing to your phone again.

For a full explanation of all features and instructions, please download the user guide from:

<https://motorolasound.com/support/>

6. Technical Specifications

Wireless	Wi-Fi 802.11 a/n/ac, Bluetooth BDR, EDR
Connection	USB C type Client
Power dissipation	- DC 5V, 350 mA maximum (ON) - DC 5V, < 10uA (OFF)

7. General Information

Cleaning

- Clean the adapter with a damp (not wet) cloth, or an anti-static wipe.
- Never use household polish as this will damage the product. Never use a dry cloth as this may cause static shock.

Environment

- Do not expose to direct sunlight.
- Do not place your product on carpets or other surfaces which generate fibers, or place it in locations preventing the free flow of air over its surfaces.
- Do not submerge any part of your product in water and do not use it in damp or humid conditions, such as bathrooms.
- Do not expose your product to fire, explosives or other hazardous conditions.

For more information about the product and the warranty, please contact us by visiting:

<https://motorolasound.com/support/>

General Public License

This product from MZGW contains code that is licensed under the General Public License ('GPL') and/or the Lesser General Public License (the 'open source software'). In accordance with the GPL, MZGW has made the relevant code available to download at: motorolasound.com/support.

EU Declaration of Conformity

Hereby, MZGW declares that the radio equipment type is in compliance with RE Directive 2014/53/EU.

UK Declaration of Conformity

Hereby, MZGW declares that this product is in compliance with the requirements for UKCA marking.

Both the EU and UK Declaration of Conformity can be obtained at

<https://motorolasound.com/support/declaration-of-conformities/>



The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc.

Manufactured by: Meizhou Guo Wei Electronics Co., Ltd

Factory address: AD1 Section, The Economic Development Area, Meizhou,
514000, Guangdong Province, China

UK address: 207 Regent Street, Suite 8, Third Floor, London, W1B 3HH. UK

EU address: 51 Bracken Road, Carlisle Offices, Dublin 18, D18 CV48. Ireland

Contact email address: support@motorolasound.com

Manufactured, distributed or sold by Meizhou Guo Wei Electronics Co., LTD., official licensee for this product. MOTOROLA and the Stylised M Logo, are trademarks or registered trademarks of Motorola Trademark Holdings, LLC. and are used under license. All other trademarks are the property of their respective owners. © 2026 Motorola Mobility LLC. All rights reserved. Android, Google Play and Android Auto are trademarks of Google LLC.

Version 3 (EU)



Séparez les éléments avant de trier



Points de collecte sur www.quefairemesdechets.fr
Privilégiez la réparation ou le don de votre appareil!

